

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number  
**WO 2005/082744 A1**

(51) International Patent Classification<sup>7</sup>: **B65D 83/14**,  
F16K 17/06

[GB/NL]; Grote Straat 26, NL-5151 JE Drunen (NL).  
**VAN SWIETEN, Roy** [NL/NL]; Stationsweg 4, NL-5321  
NH Hedel (NL).

(21) International Application Number:  
PCT/IB2004/002522

(74) Agent: **SPIERENBURG, Pieter**; Spierenburg & Partner  
AG, Patent- und Markenanwälte, Mellingerstrasse 12,  
CH-5443 Niederrohrdorf (CH).

(22) International Filing Date: 5 August 2004 (05.08.2004)

(25) Filing Language: English

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(26) Publication Language: English

(30) Priority Data:  
04405059.9 30 January 2004 (30.01.2004) EP

(71) Applicant (*for all designated States except US*): **KELTUB**  
B.V. [NL/NL]; Wolput Postbus 28, NL-5250 AA Vlijmen  
(NL).


(72) Inventors; and

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,

(75) Inventors/Applicants (*for US only*): **REGAN, Phil**

[Continued on next page]

(54) Title: PRESSURE CONTROL DEVICE

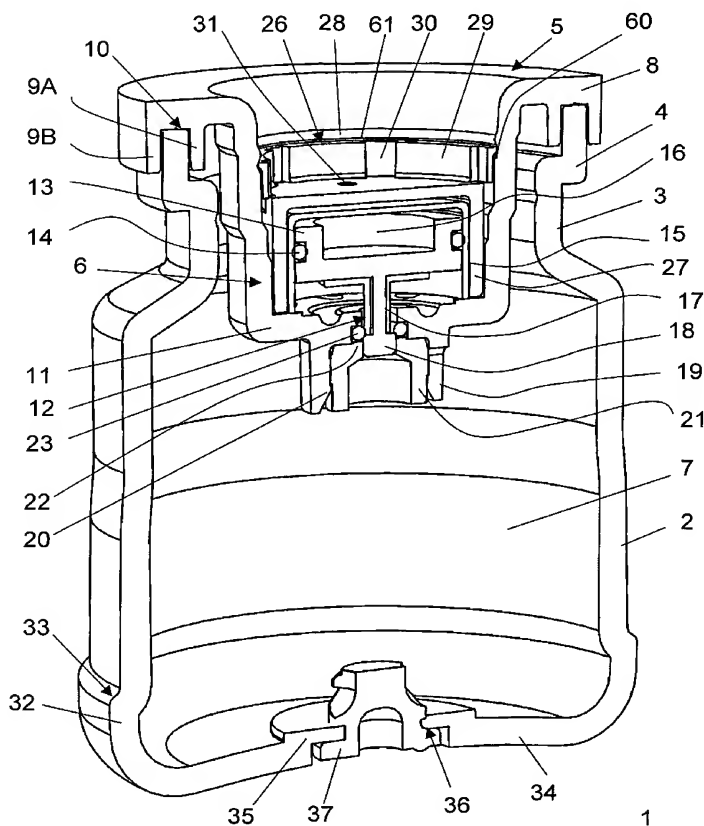

(57) Abstract: The present invention concerns a pressure control system with a pressure control device (1) for maintaining a constant predetermined excess pressure arranged in a fluid dispensing container (50; 60). The pressure control device comprises a first cylinder (15), a piston (13) movable within said first cylinder filled with a gas exerting said predetermined excess pressure, a second chamber (7), a passageway from the second chamber (7) to the outside of the device leading to the container (50; 60), a valve (18, 23) for releasing and closing said passageway. The second chamber is substantially a second cylinder (2) with a closed end (34) and an open end provided with a rim part (4), on which a closure (5) is mounted to close the second chamber, such that the second chamber is encompassing the first chamber, wherein the first chamber is part of the closure.

WO 2005/082744 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *with amended claims and statement*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*